
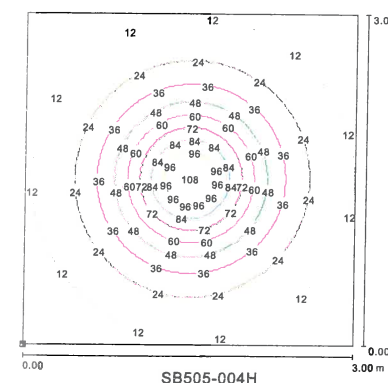
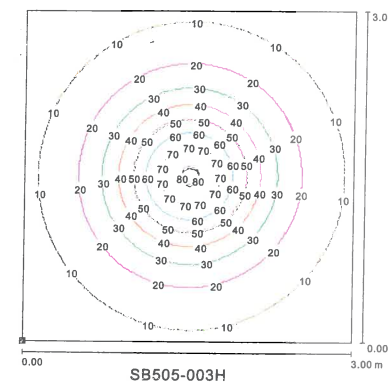



## LED Bulb Light

### SB505 Series







RoHS CE

## LED Bulb Light







Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	Weight (g)	Installation
SB505-003H	6	3	100~240V AC 50/60Hz	Cool white (5000-10000)	420	90°/120°	75	Aluminum alloy	φ 61 × 117	135	E27/E26/ B22
	6	3	100~240V AC 50/60Hz	Neutral white (3700-5000)	370	90°/120°	75	Aluminum alloy	φ 61 × 117	135	E27/E26/ B22
	6	3	100~240V AC 50/60Hz	Warm white (2600-3700)	325	90°/120°	80	Aluminum alloy	φ 61 × 117	135	E27/E26/ B22
SB505-004H	8	4	100~240V AC 50/60Hz	Cool white (5000-10000)	560	90°/120°	75	Aluminum alloy	φ 61 × 117	135	E27/E26/ B22
	8	4	100~240V AC 50/60Hz	Neutral white (3700-5000)	490	90°/120°	75	Aluminum alloy	φ 61 × 117	135	E27/E26/ B22
	8	4	100~240V AC 50/60Hz	Warm white (2600-3700)	430	90°/120°	80	Aluminum alloy	φ 61 × 117	135	E27/E26/ B22

### LED Bulb Light SB507 Series

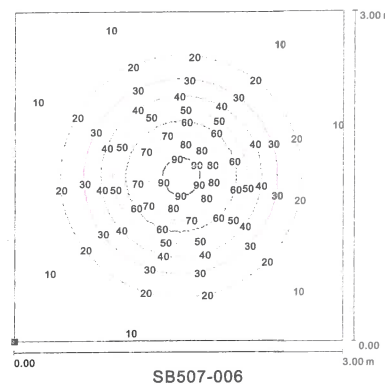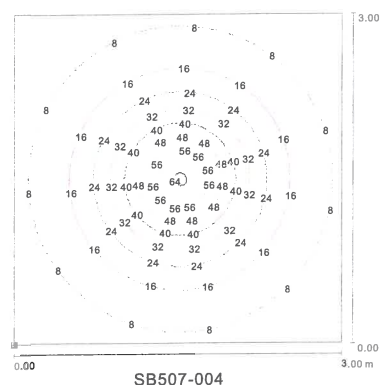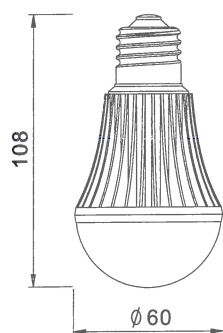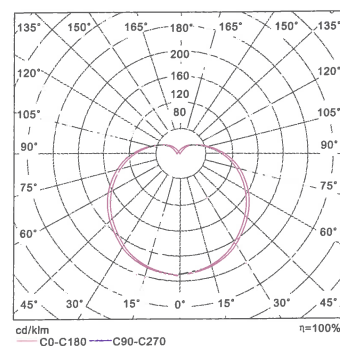

Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	Weight (g)	Installation
SB507-004	5	4	100~240V AC 50/60Hz	Cool white (5000-10000)	340	90°/120°	70	Aluminum alloy	φ60×108	120	E27/E26/B22
	5	4	100~240V AC 50/60Hz	Neutral white (3700-5000)	300	90°/120°	70	Aluminum alloy	φ60×108	120	E27/E26/B22
	5	4	100~240V AC 50/60Hz	Warm white (2600-3700)	275	90°/120°	70	Aluminum alloy	φ60×108	120	E27/E26/B22
SB507-006	7	6	100~240V AC 50/60Hz	Cool white (5000-10000)	500	90°/120°	70	Aluminum alloy	φ60×108	120	E27/E26/B22
	7	6	100~240V AC 50/60Hz	Neutral white (3700-5000)	450	90°/120°	70	Aluminum alloy	φ60×108	120	E27/E26/B22
	7	6	100~240V AC 50/60Hz	Warm white (2600-3700)	410	90°/120°	70	Aluminum alloy	φ60×108	120	E27/E26/B22

### LED Bulb Light SB508 Series

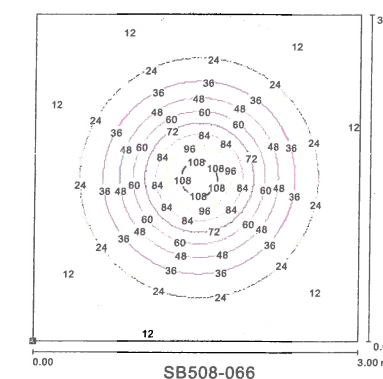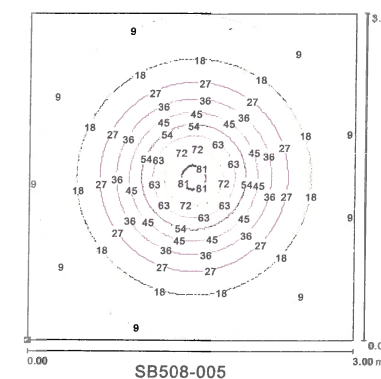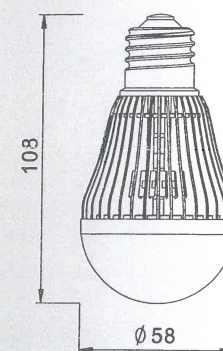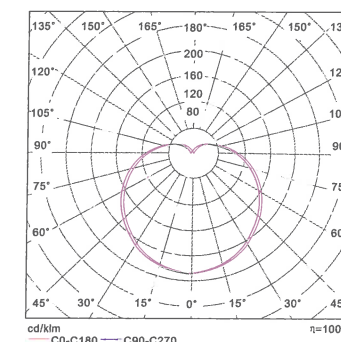

Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	Weight (g)	Installation
SB508-005	6	5	100~240V AC 50/60Hz	Cool white (5000-10000)	400	120°	70	Aluminum alloy	φ58×118	85	E27/E26/B22/GU10
	6	5	100~240V AC 50/60Hz	Neutral white (3700-5000)	365	120°	70	Aluminum alloy	φ58×118	85	E27/E26/B22/GU11
	6	5	100~240V AC 50/60Hz	Warm white (2600-3700)	330	120°	70	Aluminum alloy	φ58×118	85	E27/E26/B22/GU12
SB508-066	7	66	100~240V AC 50/60Hz	Cool white (5000-10000)	550	120°	70	Aluminum alloy	φ58×118	85	E27/E26/B22/GU10
	7	66	100~240V AC 50/60Hz	Neutral white (3700-5000)	510	120°	70	Aluminum alloy	φ58×118	85	E27/E26/B22/GU11
	7	66	100~240V AC 50/60Hz	Warm white (2600-3700)	470	120°	70	Aluminum alloy	φ58×118	85	E27/E26/B22/GU12