


LED Candle Light

SB201-001

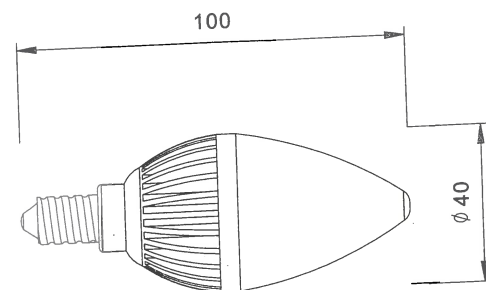


RoHS CE

Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	Weight (g)	Installation
SB201-001	3	1	100~240V AC 50/60Hz	Warm white (2600-3700)	170	90°/120°	80	Aluminum alloy	φ40mm×100	50	E14

LED Candle Light

SB202-001

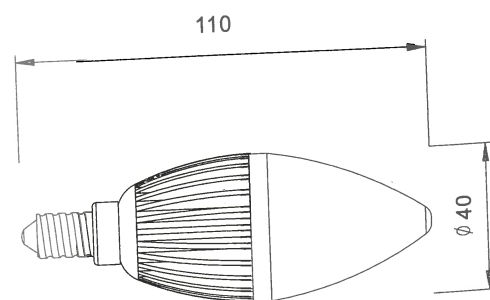

RoHS CE

Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	Weight (g)	Installation
SB202-001	5	1	100~240V AC 50/60Hz	Warm white (2600-3700)	220	90°/120°	80	Aluminum alloy	φ40mm×110	50	E14

LED Tube Fixture

01ST402



RoHS CE

Model/Item	Tube	Material	Including	Dimension (mm)	IP Rate
01ST402A	600mm*2pcs	Sheet iron and coating	PC/PC+S/S clips with wiring,lampholder, starterholder without ballast and tube	Width:160 Height:55	IP20
01ST402C	1200mm*2pcs	Sheet iron and coating	PC/PC+S/S clips with wiring,lampholder, starterholder without ballast and tube	Width:160 Height:55	IP20
01ST402D	1500mm*2pcs	Sheet iron and coating	PC/PC+S/S clips with wiring,lampholder, starterholder without ballast and tube	Width:160 Height:55	IP20

LED Tube Fixture

05ST402



RoHS CE

Model/Item	Tube	Material	Including	Dimension (mm)	IP Rate
05ST402A	600mm*2pcs	High-quality Sheet iron and coating	PC/PC+S/S clips with wiring,lampholder, starterholder without ballast and tube	663X129X88	IP65
05ST402C	1200mm*2pcs	High-quality Sheet iron and coating	PC/PC+S/S clips with wiring,lampholder, starterholder without ballast and tube	1265X129X88	IP65
05ST402D	1500mm*2pcs	High-quality Sheet iron and coating	PC/PC+S/S clips with wiring,lampholder, starterholder without ballast and tube	1563X129X88	IP65

