




LED Ceiling Light



Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Housing	Dimension (mm)	Weight (Kg)	Installation (mm)
SC101-080	6	80	90~264VAC	2600-10000	400	Aluminum alloy Punch	Φ290×90	340	Φ6 Expansion pipe, Screw St3.9×19
SC101-112	8.3	112	90~264VAC	2600-10000	560	Aluminum alloy Punch	Φ290×90	350	Φ6 Expansion pipe, Screw St3.9×19

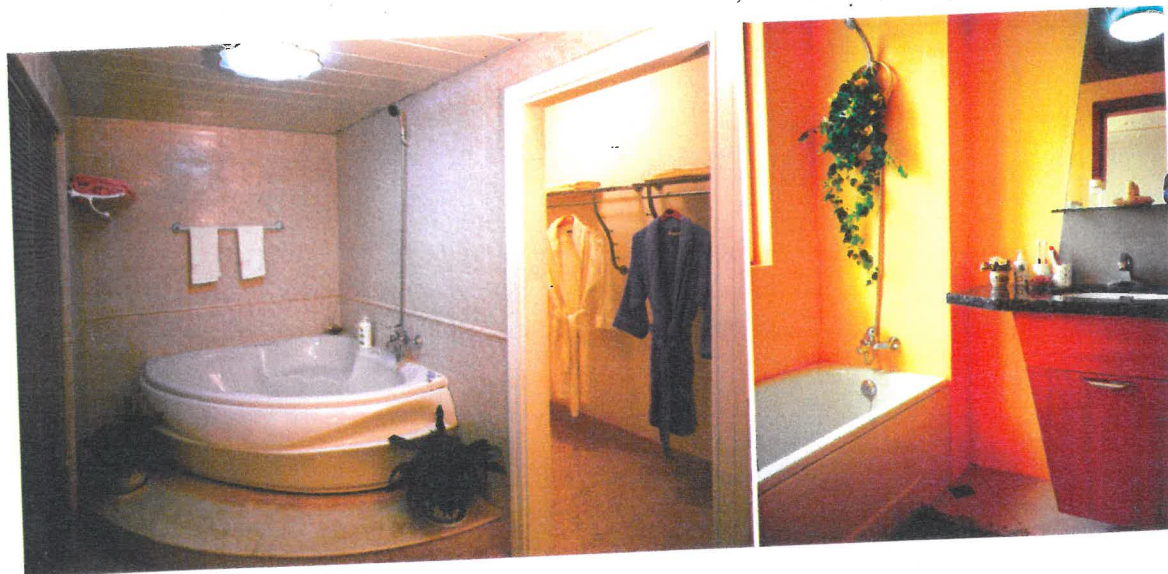


G24 LED Light SG242-045

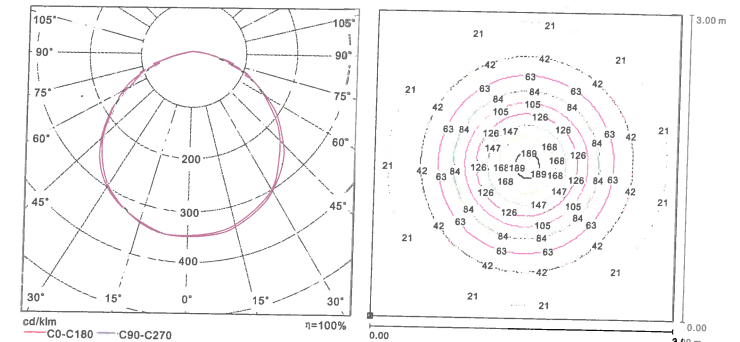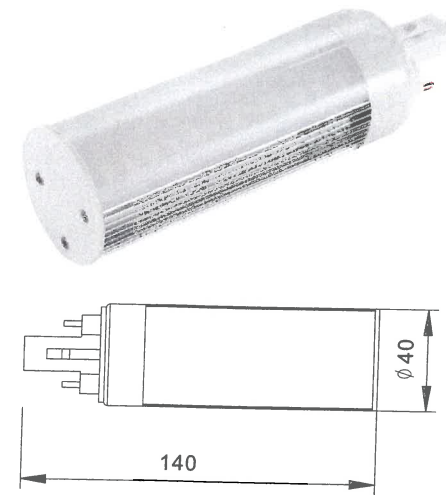

Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	Weight (g)	Installation
SG242-045	9	45	100~240V AC 50/60Hz	Cool white (5000-10000)	560	90°/120°	70	Aluminum alloy	Φ40mm×140	160	G24 2 Pin
	9	45	100~240V AC 50/60Hz	Neutral white (3700-5000)	560	90°/120°	70	Aluminum alloy	Φ40mm×140	160	G24 2 Pin
	9	45	100~240V AC 50/60Hz	Warm white (2600-3700)	620	90°/120°	70	Aluminum alloy	Φ40mm×140	160	G24 2 Pin

G24 LED Light SG243-060

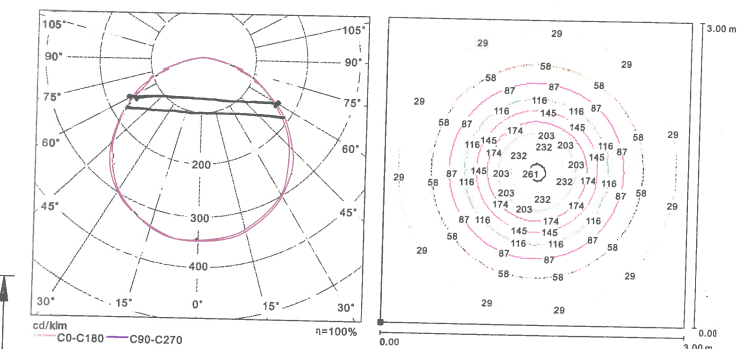

Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	Weight (g)	Installation
SG243-060	13	60	100~240V AC 50/60Hz	Cool white (5000-10000)	760	90°/120°	70	Aluminum alloy	Φ40mm×169	160	G24 2 Pin
	13	60	100~240V AC 50/60Hz	Neutral white (3700-5000)	760	90°/120°	70	Aluminum alloy	Φ40mm×169	160	G24 2 Pin
	13	60	100~240V AC 50/60Hz	Warm white (2600-3700)	840	90°/120°	70	Aluminum alloy	Φ40mm×169	160	G24 2 Pin