





LED Down Light

SD207 Series



RoHS


CE




Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	Weight (g)	Installation (mm)
SD207-012	18	12	100~240VAC 50/60Hz	Cool white (5000-10000)	1370	90°	75	Aluminum alloy	Φ 240 × 85	1580	Φ 225 Hole
	18	12	100~240VAC 50/60Hz	Neutral white (3700-5000)	1200	90°	75	Aluminum alloy	Φ 240 × 85	1580	Φ 225 Hole
	18	12	100~240VAC 50/60Hz	Warm white (2600-3700)	1050	90°	80	Aluminum alloy	Φ 240 × 85	1580	Φ 225 Hole
SD207-216	26	216	100~240VAC 50/60Hz	Cool white (5000-10000)	1580	90°	70	Aluminum alloy	Φ 240 × 85	1580	Φ 225 Hole
	26	216	100~240VAC 50/60Hz	Neutral white (3700-5000)	1580	90°	70	Aluminum alloy	Φ 240 × 85	1580	Φ 225 Hole
	26	216	100~240VAC 50/60Hz	Warm white (2600-3700)	1580	90°	70	Aluminum alloy	Φ 240 × 85	1580	Φ 225 Hole




Lighting the future

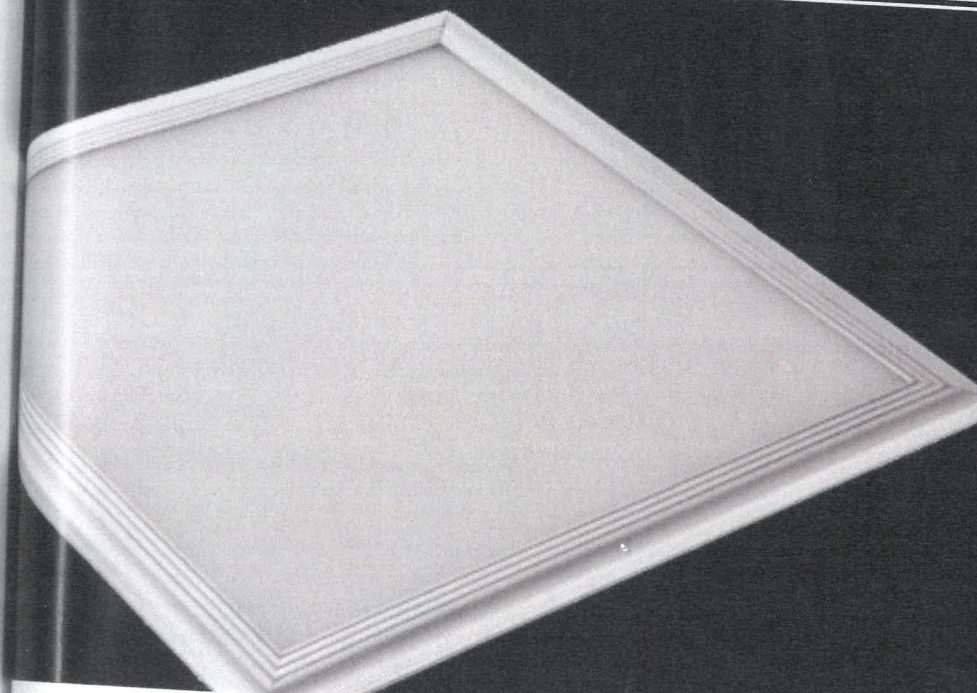

LED Panel Light

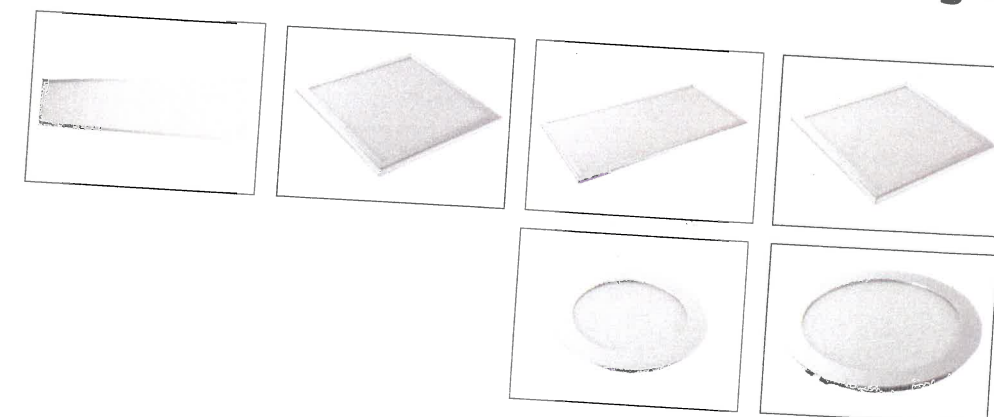


LED Panel Light SG201

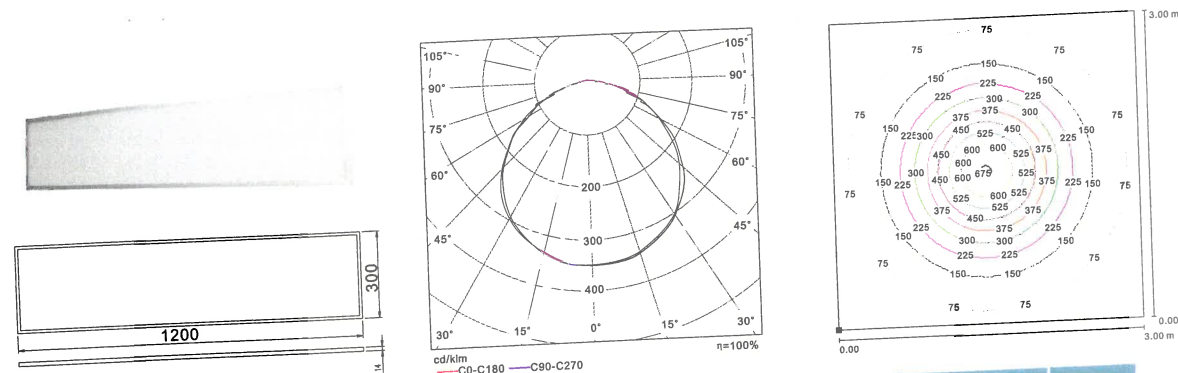


Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	IP Rate
SC201-488	30	488	100~240V AC 50/60Hz	Cool white (6000-7000)	1950	120°	70	Aluminum alloy	1200X300X14	IP40

LED Panel Light SG202

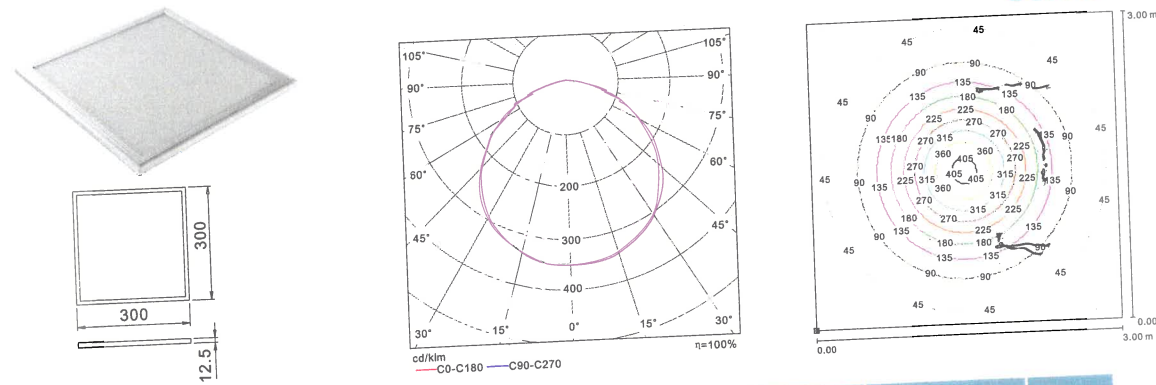


Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	IP Rate
SC202-180	18	180	100~240V AC 50/60Hz	Cool white (6000-7000)	1200	120°	70	Aluminum alloy	300X300X12.5	IP40

LED Panel Light SG203

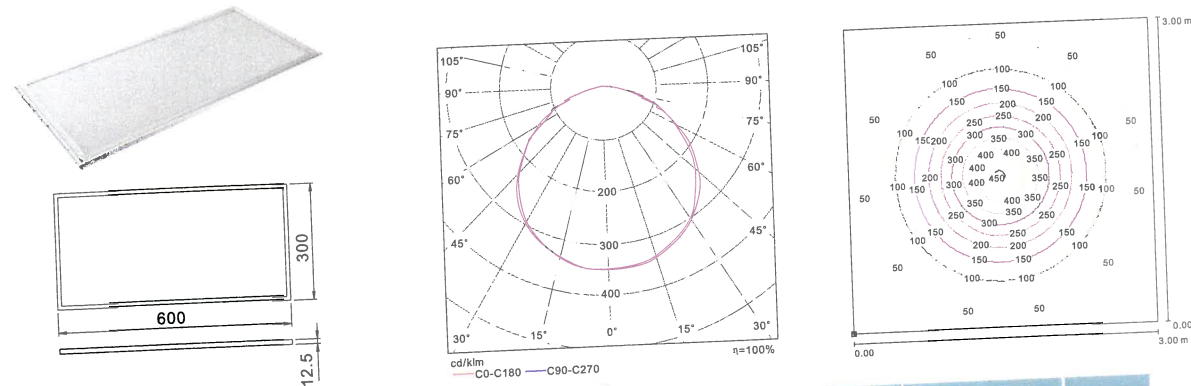


Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	IP Rate
SC203-180	18	180	100~240V AC 50/60Hz	Cool white (6000-7000)	1300	120°	70	Aluminum alloy	600X300X12.5	IP40

LED Panel Light SC204

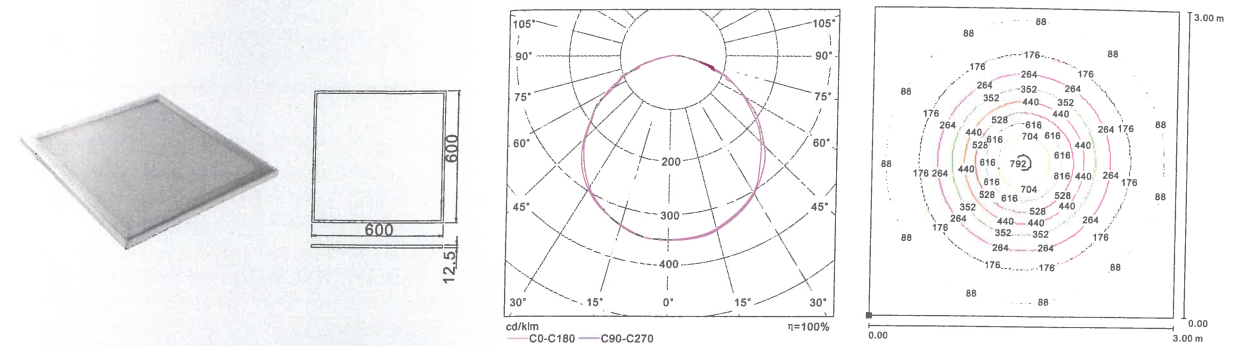


Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	IP Rate
SC204-360	36	360	100~240V AC 50/60Hz	Cool white (6000-7000)	2300	120°	70	Aluminum alloy	600X600X12.5	IP40

LED Panel Light SG301

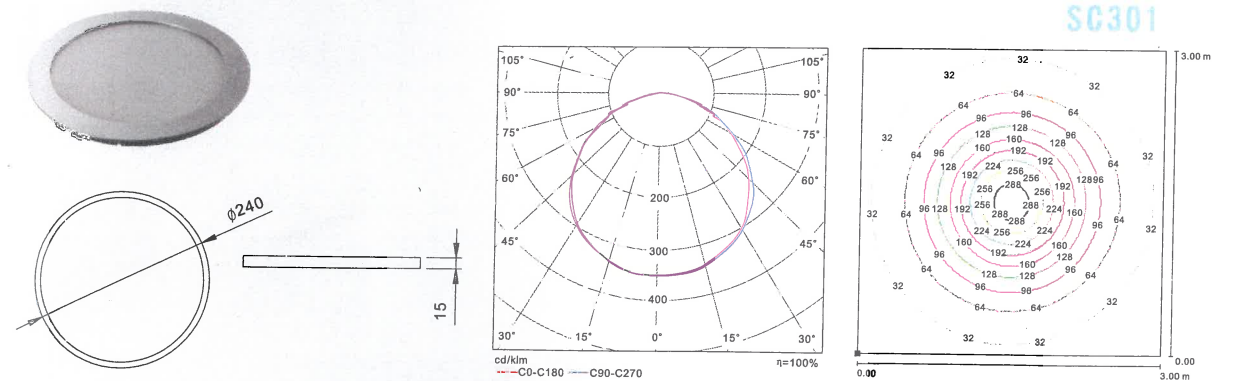

Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	IP Rate
SC301-150	15	150	100~240V AC 50/60Hz	Cool white (6000-7000)	880	120°	70	Aluminum alloy	φ 240 × 15	IP40

LED Panel Light SG302

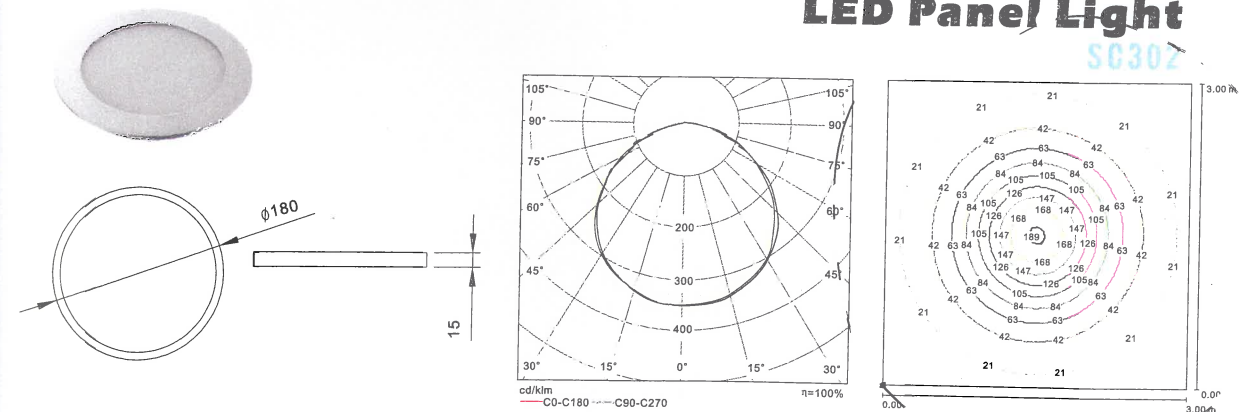

Model/Item	Power (watt)	LED Qty	Input Voltage	Color Temp. (K)	Luminous Output (lm)	Beam Angle	CRI	Housing	Dimension (mm)	IP Rate
SC302-90	9	90	100~240V AC 50/60Hz	Cool white (6000-7000)	550	120°	70	Aluminum alloy	φ 180 × 15	IP40