

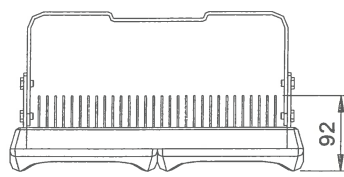
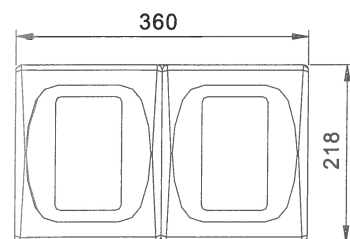





LED Tunnel Light SU601-056

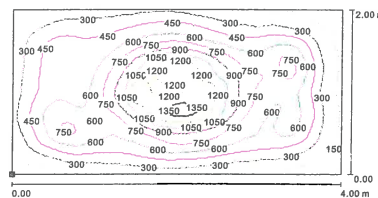

Model/Item	Power (watt)	Input Voltage	Color Temp. (K)	Luminous Output (lm)	CRI	Power Factor	Lifespan (L70)	IP Rate	Dimension (mm)	Weight (Kg)	Installation (mm)
SU601-056	68	100~240V AC 50/60Hz	Cool white (5000-10000)	5600	75	0.95	50,000Hrs	IP65	360×218×92	5.5	2-M12 Bolt
	68	100~240V AC 50/60Hz	Neutral white (3700-5000)	4900	75	0.95	50,000Hrs	IP65	360×218×92	5.5	2-M12 Bolt
	68	100~240V AC 50/60Hz	Warm white (2600-3700)	4300	80	0.95	50,000Hrs	IP65	360×218×92	5.5	2-M12 Bolt

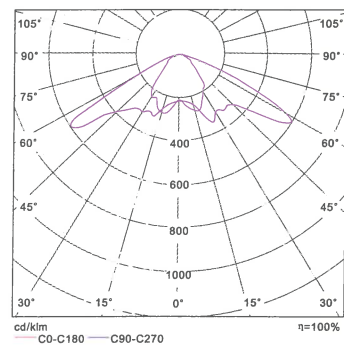

LED Tunnel Light SU602-056


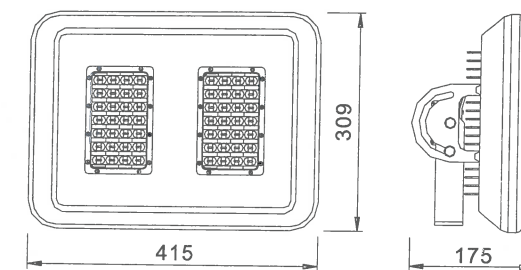
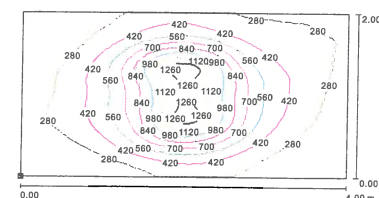
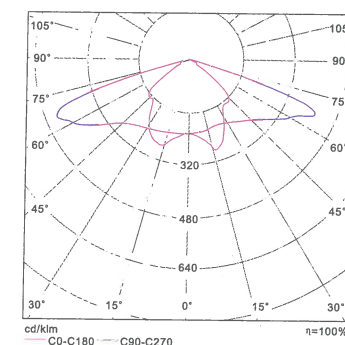


Model/Item	Power (watt)	Input Voltage	Color Temp. (K)	Luminous Output (lm)	CRI	Power Factor	Lifespan (L70)	IP Rate	Dimension (mm)	Weight (Kg)	Installation (mm)
SU602-056	68	100~240V AC 50/60Hz	Cool white (5000-10000)	5600	75	0.95	50,000Hrs	IP65	415×309×175	8.0	2-M10 Bolt
	68	100~240V AC 50/60Hz	Neutral white (3700-5000)	4900	75	0.95	50,000Hrs	IP65	415×309×175	8.0	2-M10 Bolt
	68	100~240V AC 50/60Hz	Warm white (2600-3700)	4300	80	0.95	50,000Hrs	IP65	415×309×175	8.0	2-M10 Bolt






LED Tunnel Light SU602-112

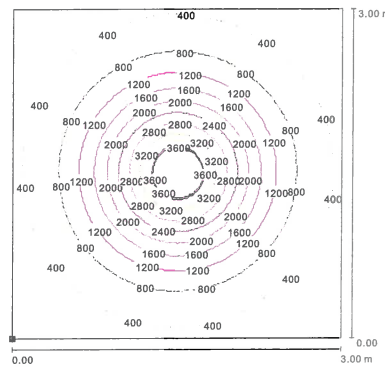
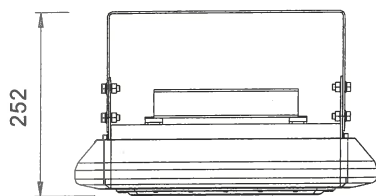
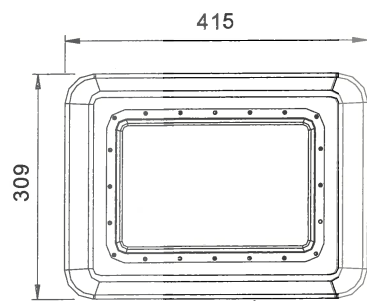
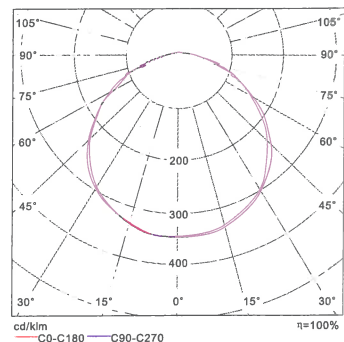


RoHS CE

Model/Item	Power (watt)	Input Voltage	Color Temp. (K)	Luminous Output (lm)	CRI	Power Factor	Lifespan (L70)	IP Rate	Dimension (mm)	Weight (Kg)	Installation (mm)
	135	100~240V AC 50/60Hz	Cool white (5000-10000)	12500	75	0.95	50,000Hrs	IP65	415×309×252	8.6	2-M10 Bolt
SU602-112	135	100~240V AC 50/60Hz	Neutral white (3700-5000)	11000	75	0.95	50,000Hrs	IP65	415×309×252	8.6	2-M10 Bolt
	135	100~240V AC 50/60Hz	Warm white (2600-3700)	9700	80	0.95	50,000Hrs	IP65	415×309×252	8.6	2-M10 Bolt

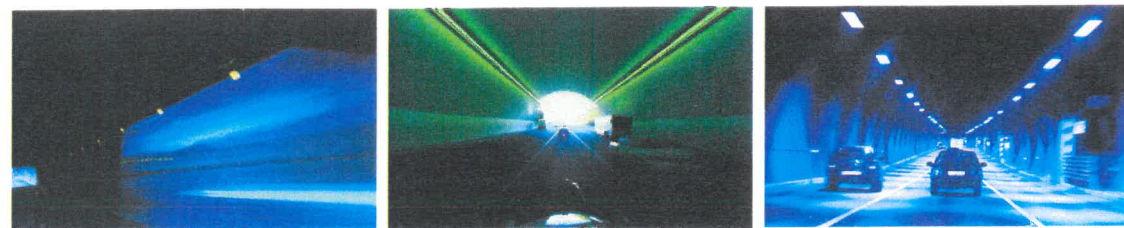

LED Stage Light SU603-112

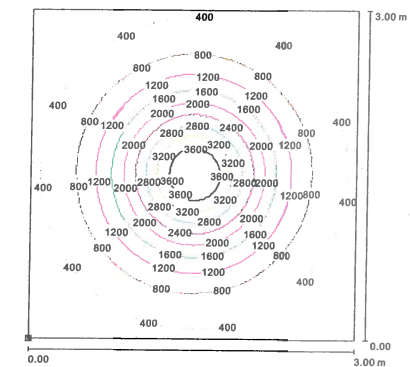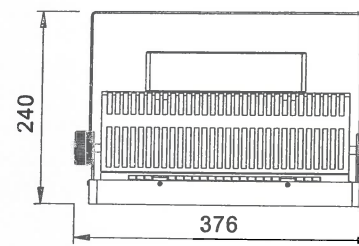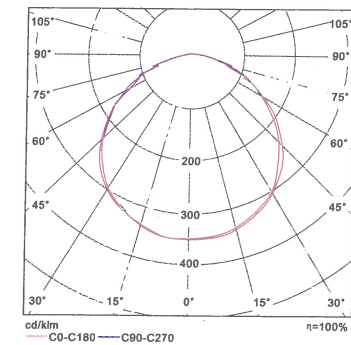

RoHS CE

Model/Item	Power (watt)	Input Voltage	Color Temp. (K)	Luminous Output (lm)	CRI	Power Factor	Lifespan (L70)	IP Rate	Dimension (mm)	Weight (Kg)	Installation (mm)
	135	100~240V AC 50/60Hz	Cool white (5000-10000)	12500	75	0.95	50,000Hrs	IP54	376×245×240	5.8	4-M8 Bolt
SU603-112	135	100~240V AC 50/60Hz	Neutral white (3700-5000)	11000	75	0.95	50,000Hrs	IP54	376×245×240	5.8	4-M8 Bolt
	135	100~240V AC 50/60Hz	Warm white (2600-3700)	9700	80	0.95	50,000Hrs	IP54	376×245×240	5.8	4-M8 Bolt

